

N-Series Superior Night Vision 1.3 Megapixel Fixed Box Network Camera

FB-130Np


WDR Enhancement[®]





- N-Series Sony Exmor 1.3M Indoor Fixed Box Camera
- Brickcom **WDR Enhancement[®]** technology inside
- HDTV Quality (720p @ 30fps)
- **Intelligent Multi-Profile Sensor Management[®]** for Different Environments
- Best for Car-Plate Recognition
- Removable IR-cut Filter /Auto Light Sensor for Day and Night
- Two-way Audio/Built-in SD/SDHC Memory Card Slot for Local Storage
- 1 DI/DO for External Alarm and Sensor Device
- IEEE 802.11 a/b/g/n Compliance Wireless Connectivity (*)
- WPS Function Support for Easy Wireless Network Setup (*)
- Power over Ethernet



Photo Indication & Dimension Diagram

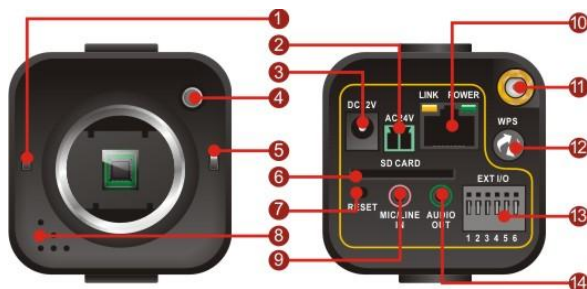

- | | |
|------------------------------|---|
| 1 Status LED | 9 Microphone/Line In |
| 2 Power Connector (AC24V In) | 10 Ethernet RJ45 10/100 Socket
(Link/Power LED embedded) |
| 3 Power Connector (DC12V In) | 11 Detachable Antenna |
| 4 Light Sensor | 12 WPS Button (*) |
| 5 WPS LED (*) | 13 Extension I/O Terminal Block |
| 6 SD/SDHC Card Slot | 14 Audio Out |
| 7 Reset Button | 15 Auto Iris Connector |
| 8 Build-in Microphone | |

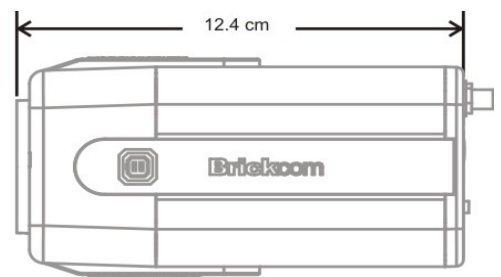

FB-130N Series

Camera		General	
Hardware System	CPU: 500 MHz Flash: 16M RAM: 128M DDR	Communication	Ethernet : one 10/100Mbps RJ-45 IEEE 802.11a/b/g/n compliance (WFB-130N) Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, Wireless 802.11 a/b/g/n (WFB-130N)
Image Sensor	Sensor Type : 1/3" Sony CMOS Sensor Sensor Resolution : 1280 x 1024 pixel Minimum Illumination : 0.1 Lux (F1.3,B/W) 0.5 Lux(F1.3,Color)	Power input	AC 24V DC 12V / 1A (Power Supply) PoE:802.3af Compliant
Day & Night Support	Mechanical ICR , Triggered by Light sensor, Scheduling, Digital Input	LEDs	FB-130N Status/Ethernet(Power/Link) WFB-130N Status/WPS/Ethernet(Power/Link)
Audio		Power consumption	5 watts
Audio Streaming	2-way audio support	Environment	Operating Temperature : 0°C ~ 50°C (32°F ~122°F) Operating Humidity : 10% ~ 80%
Audio Compression	G.711, AMR (8 kHz, Mono, PCM)	Dimension	124(L)*60 (W)*65(H) mm
Audio Input/ Output	External microphone or line input (Unbalanced, 1.4 Vp-p, 1 Vrms)/Line Output	Weight	FB-130N Net: 380g (Without Lens)/0.83lb Gross : 893G/1.97lb WFB-130N Net: 385g (Without Lens)/0.85lb Gross: 903G/2.00lb
Video		Certification	FCC, CE
Video Image Compression	H.264 / MPEG4 / MJPEG	Warranty	Limited 2-year warranty
Video Setting	Auto Exposure Control: Sport, Normal, Night Vision, User Defined Auto Gain Control: 1X~5X Shutter Speed: 1/32000~1s		
S/N Ratio	Above 50dB		
Image Resolution	1.3M - 1280x1024@25fps 1M -1280x720@30fps		

FB-130N Series	FB-130Np	WFB-130Np
Wireless (11a/b/g/n dual band WiFi)	-	✓
Auto Iris Support	✓	✓
WPS Button	-	✓

Work Best With

Camera Accessories Options		Network Equipment Options	
	M13VG288IR 2.2x Manual zoom/focus, DC iris		PS-7242IL-AF 24-port 10/ 100M PoE Web Smart Ethernet Switch
	YV2.1x2.8SR4A-SA2L 2.1x Vari-focal Lens with DC Iris		
	CI-803C Camera Bracket		