

# Unique Series

BRICKCOM SPECIAL & REMARKABLE





## MD-H600Np-360 DN

### 6 Megapixel Surround Day & Night High Performance Mini-Dome

- Sony Exmor 6MP Mini Dome Camera
- H.264 High Profile Video Compression Technology
- Support HDTV Video Quality
- Brickcom WDR Enhancement® Technology
- Built-in 180° Panoramic View and 360° Surrounding View
- DI/DO Supported
- 10 Meters IR range
- IK10 Vandal Proof and IP67 Weather Proof
- Built-in Micro SD/ SDHC / SDXC Memory Card Slot for Local Storage
- Removable IR-Cut Filter for Day and Night Function



### Dimensions

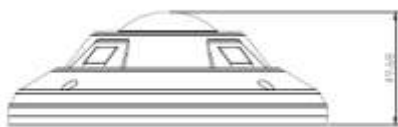

Traffic



Parking Lot



Retail



Industry

Camera	
<b>Models</b>	<b>MD-H600np-360 DN</b>
<b>Hardware System</b>	Flash: 32MB RAM: 512MB DDR
<b>Image Sensor</b>	Sensor Type : 1/1.8" Sony Exmor CMOS Sensor Sensor Resolution : 6MP (3096 x 2094)
<b>Lens Spec</b>	Lens Type: Board Lens Focal Length:1.05mm F=2.8 Iris: Fixed Iris View Angle:(H)182°±2°
<b>Local Storage</b>	Built-in Micro SD / SDHC / SDXC Max.128G Memory Card Slot
<b>Day &amp; Night ICR</b>	Triggered by Light sensor, Scheduling, Digital Input
<b>Minimum Illumination</b>	0 Lux(IR On, B/W) 0.005 Lux(F1.6,B/W) 0.006Lux(F1.6,Color)
<b>IR Illuminators</b>	Built -In IR Illuminators Distance: 10 meters IR LED: 4 pcs
Video	
<b>Compression Streaming</b>	H.264 / MJPEG Simultaneous multiple streams
<b>Video Setting</b>	Multi-Profile Image Management: Day/ Night/ Sunset/ User 1/ User 2  Manual Exposure Control: 1/120000s ~ 1s Manual Gain Control: 1X ~ 48X
<b>S/N Ratio</b>	Above 50 dB
<b>Image Resolution</b>	5.5MP (2720 x 2040) • (15fps)
<b>WDR</b>	D-WDR
<b>TV Out</b>	NTSC (30fps) / PAL (25fps)

Events and Alarm Management	
<b>Events</b>	Motion Detection/ Schedule/ Audio Detection/ Digital Input/ Temperature Alarm
<b>Alarm</b>	Stream/Snapshot to FTP/Email/Samba/SD-Card HTTP/Email Notification/ Digital Output
Audio	
<b>Audio Streaming</b>	one-way Audio Support
<b>Audio Compression</b>	G.711/AMR
<b>Audio Input/ Output</b>	Built-in MIC
General	
<b>Communication</b>	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, HTTPS. Samba, PPPoE, UPnP, RTP, RTSP, RTCP, IPv4, IPv6, 802.1x
<b>Power Input</b>	802.3af PoE
<b>Temperature/ Environment</b>	Operating Temperature: -40°C ~ 50°C (-40°F ~ 122°F) Start-up Temperature: -20°C ~ 50°C (-4°F ~ 122°F)  Operating Humidity: 10% ~ 90%
<b>Max. Power Consumption</b>	6 watts
<b>Dimension</b>	140(L) X140(W) X 49.68(H) mm
<b>Weight</b>	460g/1.02lb
<b>Housing</b>	Weather-proof (IP67) Vandal-proof (IK10)
<b>Certification</b>	FCC/CE / IK10 / IP67/ UV test/ECE R118
<b>Viewing System Requirements</b>	OS: Microsoft Windows 8.1/8/7/Vista/XP/2000 Browser: Mozilla Firefox, Internet Explorer 6/7 or above, Safari, Google Chrome Cell Phone: 3GPP player Real Player: 10.5 or above Quick Time: 6.6 or above VLC
<b>Warranty</b>	Limited 36 months warranty

## Camera Accessories Options



**CI-802 A**  
Camera bracket stand



**VD-B-ADAP**  
Camera transfer bracket



**VDMD-B-WALL**  
Wall mount bracket

## Network Equipilla Options



**PS-588I V3**  
9 port 10/100M PoE Fast Ethernet Switch



**PS-7242IL-AT**  
24-port 10/ 100M High Power PoE+ Web Smart Ethernet Switch



**POE30U V2**  
High Power PoE Injector